

12,000 lbs. - 18,000 lbs. capacities

RTP15/RTP18

Heavy Duty Two - Post Lifts
15,000 / 18,000 lbs. capacities




FEATURES:

- Single point lock release at operations center
- Features symmetrical column design
- Direct-Pull Lifting - high efficiency, low maintenance technology
- Closed loop hydraulic system
- Durable powder coat paint
- Padded shut-off bar
- Low profile arms and adjustable truck adapters

Truck Adapter Extensions

The RTP15 and RTP18 feature extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 5" and 10"

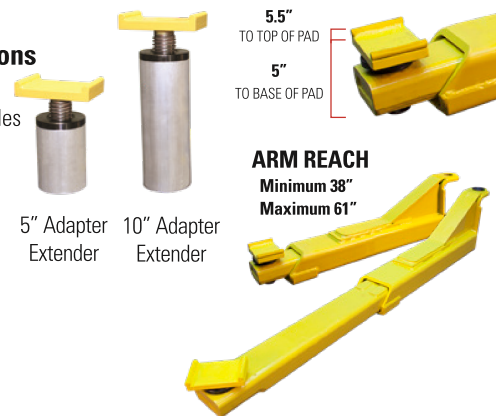

Gold Certified

Revolution's RTP15 and RTP18 lifts are ALI Certified. This lift meets the highest industry safety and performance standards. Look for the Gold label.



Specifications	RTP15N000 / STANDARD RTP15N001 ADDS 20" OF HEIGHT RTP15N002 ADDS 52" OF HEIGHT	RTP18N000 / STANDARD RTP18N001 ADDS 20" OF HEIGHT RTP18N002 ADDS 52" OF HEIGHT
Capacity	15,000 lbs. (6804kg)	18,000 lbs. (8164kg)
Rise*	83" (2120mm)	83" (2120mm)
Overall Height	154-3/4" (3930mm) 175" (4445mm) 199" (5054mm)	154-3/4" (3930mm) 175" (4445mm) 199" (5054mm)
Height to Shut-Off	147-1/4" (3735mm) 167-1/4" (4250mm) 191-1/4" (4860mm)	147-1/4" (3735mm) 167-1/4" (4250mm) 191-1/4" (4860mm)
Minimum Ceiling Height	155-3/4" (3956mm) 176" (4470mm) 200" (5080mm)	155-3/4" (3956mm) 176" (4470mm) 200" (5080mm)
Overall Floor Width	154-3/8" (3921mm)	154-3/8" (3921mm)
Inside Column Width	119-5/8" (3038mm)	119-5/8" (3038mm)
Drive Through	108-1/4" (2750mm)	108-1/4" (2750mm)
Arm Reach	38" (965mm) to 61" (1549mm)	38" (965mm) to 61" (1549mm)
Minimum Adapter Height	5-1/2" (139mm)	5-1/2" (139mm)
Stackable Adapter Height (low extension)	10-1/2" (266mm)	10-1/2" (266mm)
Stackable Adapter Height (high extension)	15-1/2" (393mm)	15-1/2" (393mm)
Voltage/Amps	208/230v, 20 amps	208/230v, 20 amps
Motor/Phase	2 HP/1Ø	2 HP/1Ø

*Maximum lifting height with 10" adapters LIFTS AVAILABLE IN RED OR BLUE